

## WHY THE SL01 OUTSHINES THE COMPETITION



- Constructed of marine-grade virgin brass. Feel, see, experience the difference!
- Includes standard 10' wire lead to minimize the length of connection needed, simplifying installations.
- Constructed with high quality CREE LED chips. CREE is the leading LED source provider in the world.
- Control multiple light intensities ranging from 200 lumens to 850 lumens.
- Change your optimal beam spread with removable drop in optics, available in 15°, 25°, 40°, 60°, and 80°.
- Smarter design including adjustable knuckle with a hex through-bolt and soldered, heat shrunk connections housed inside the fixture.
- Domed convex borosilicate glass lens to prevent water from collecting on the lens.
- Ongoing research and development, staying a step ahead of the competition.



STERLING  LIGHTING

201 Davis Drive, Suite G  
Sterling, VA 20164  
[www.sterling-lighting.com](http://www.sterling-lighting.com)  
1-800-939-1849

SL01 UP LIGHT

SL01

**INTENDED USE**

The SL01 is our signature light, rated top of its class. This fixture is sleek, versatile and has a compact design. Ideal for illuminating walls, flags, trees, architectural POI's, inset corners, and more. The SL01 also provides safety and security for yards and other large areas. With a seamless locking design at its base, you're sure to get the right look for every project.

**CONSTRUCTION**

The exterior casing is crafted from top of the line, marine-grade virgin brass with a beautiful antique finish. The lens is made of borosilicate convex glass with a premium grade sealant.


**ELECTRICAL SYSTEM**

All electronic drivers are zcomply with US and Canadian electrical codes.  
Adjustable lumen options: 850lm, 650lm, 500lm, 430lm, 280lm, 200lm.  
Easy replacement of driver or LED chip and removable optics if service is needed.

**LISTING**



ETL, UL1838, RoHS rated.

Note: Adjustable lumen output and beam spread. Dual plugs to prevent insect penetration.

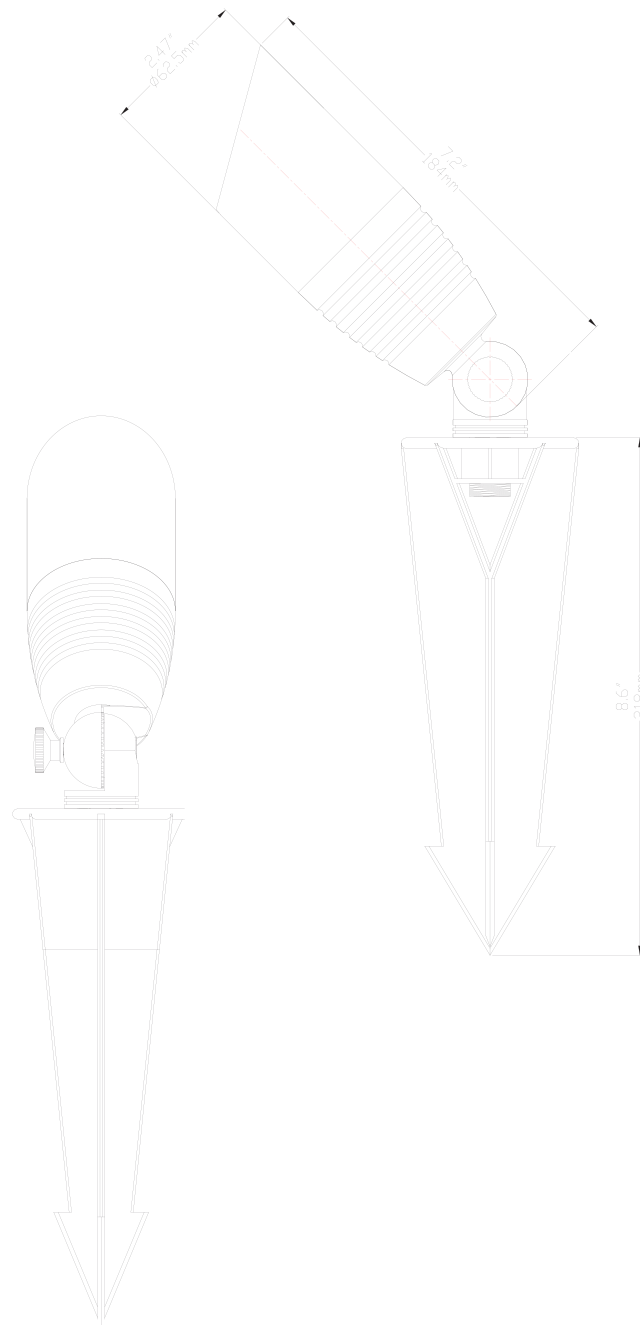

FIXTURE: DEDICATED LED UP LIGHT		
NAME: SL01	TYPE: DEDICATED LOW VOLTAGE LED	WEIGHT: 5.5LBS
BEAM ANGLE: 15° 25° 40° 60° 80°	OPERATING VOLTAGE: 9V - 15V AC	WATTAGE: 3W(MIN) - 11W(MAX)
COLOR TEMP: 2700K/3000K/5000K	WIRE LEAD: 10' 18AWG	TEST: BASED ON 330LM DISTANCE

SL01 ADJUSTABLE LUMEN INSTRUCTIONS (PINS ON DRIVER)	
NO PINS UP: 850 LUMENS (MAX)	1, 2 & 3 PINS UP: 430 LUMENS
1 PIN UP: 650 LUMENS	1, 2, 3 & 4 PINS UP: 280 LUMENS
1 & 2 PINS UP: 500 LUMENS	1, 2, 3, 4 & 5 PINS UP: 200 LUMENS (MIN)

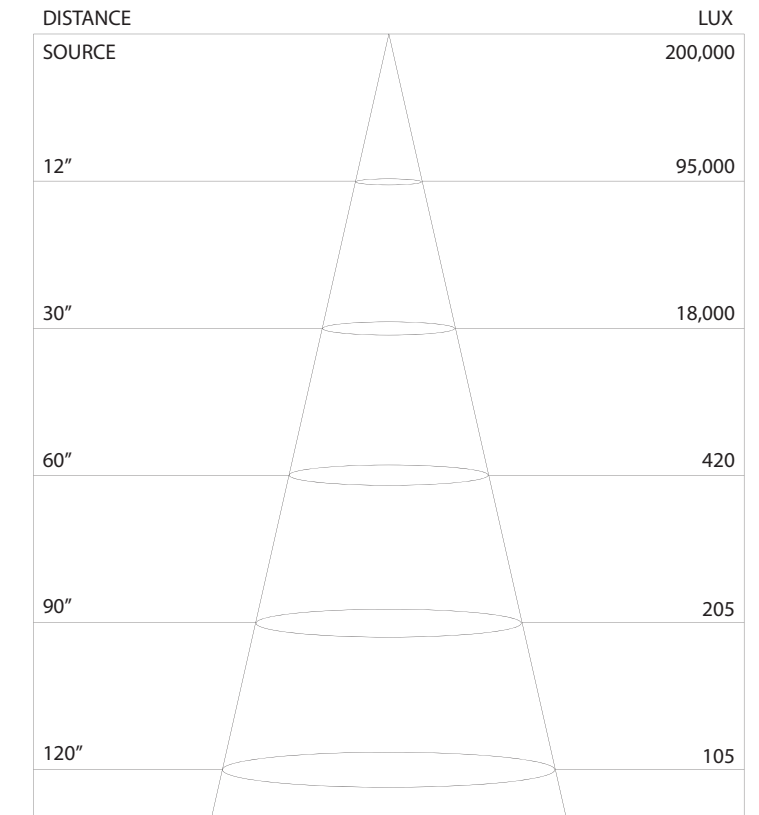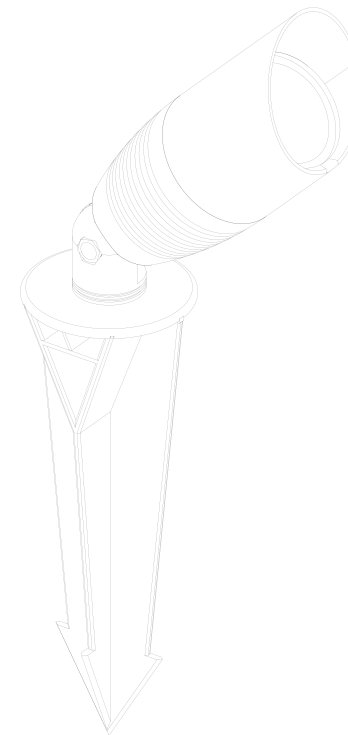

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distances.

